




BUILD YOUR KIT.T

Step 3

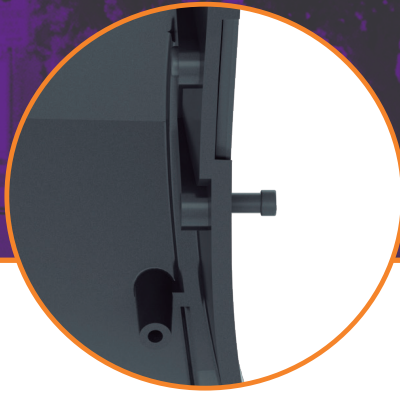

Fit the shorter end of the left door locking pin **90B** into the hole indicated on the left rear wing **90A**.

Step 4




Finally, fix the left door locking pin **90B** to the left rear wing **90A** with a **GM** screw.

RESULT



This is what the left rear wing looks like at this stage of the assembly.

Step 1

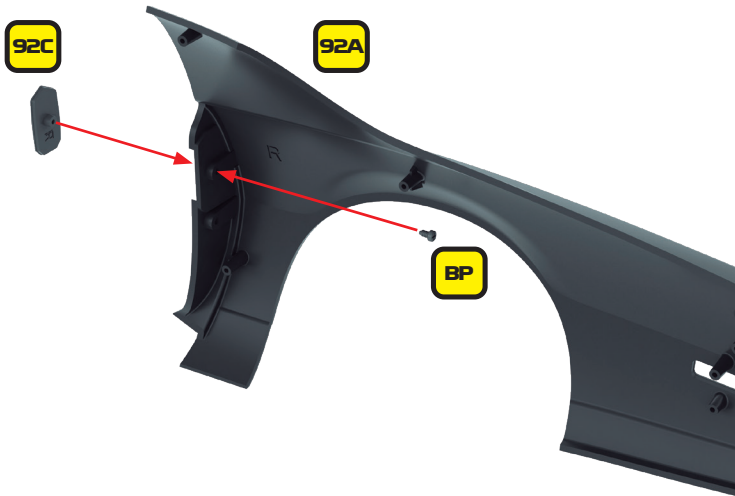

Place the air outlet grille **92C** over the rectangular slit and hole in the right rear wing **92A**. Fasten the grille to the wing with a **BP** screw.

Step 2



Fit the shorter end of the right door locking pin **92B** into the hole indicated on the right rear wing **92A**. Secure the locking pin to the wing with a **GM** screw.